

Product Code

COA-A40DEN

2.3

Extruded Polyester Food Grade (4mm)


Top Cover [mm]	Smooth (Natural)
Bottom Cover [mm]	Embossed
Belt Support	Steel - Stainless Steel/Nylon Wear Strips or Live Rollers
No of Plies	Extruded
Temp Range [°C]	-40 + 100
Max Working Tension [N/mm]	48N/mm for 1% Elongation at 20°C
Max Width [mm]	1000
Thickness [mm] Nominal	4.0
Normal flexing [mm]	70 (180°C wrap)
Back flexing [mm]	60 (120°C wrap)
Weight [Kg per square meters]	4.6
Join Type	Mirror Weld/Rod Weld/Mechanical Plate Fasteners

Applications

- Applications where exceptionally high sanitation conditions must prevail (AQIS-FDA-USDA approved)

Distinguishing Qualities

- Non-marking, non-porous, tear and cut resistant
- Highly resistant to oils, fats, chemical and grease
- FDA approved for contact with fatty and wet foods #21CFR177-2600 & #21CFR177-1590 for contact with dry bulk food product
- Can be fitted with a wide range of Vee profile and Cleated profiles
- Homogeneous, 55 Shore D

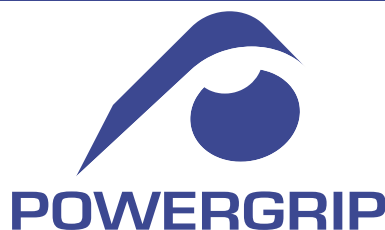

1300 747 470

www.powergrip.com.au

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122