

Product Code

**COG-CF16P/T**

**2.5**

**2 ply PVC Food Grade (Tan)**


Top Cover [mm]	0.7mm PVC Food Grade (Tan)
Bottom Cover [mm]	Polyester Fabric PVC Impregnated
Belt Support	Steel - Stainless Steel/Live Rollers
No of Plies	2 ply
Temp Range [°C]	-5 + 80
Max Working Tension [N/mm]	16N/mm 8N/mm for 1% Elongation
Max Width [mm]	2000
Thickness [mm] Nominal	2.5
Normal flexing [mm]	50
Back flexing [mm]	120
Weight [Kg per square meters]	3.0
Join Type	Finger-Overlap-Finger/Bias Lap/Mechanical Fasteners

Applications

- Food grade conveying applications
- Lightweight conveyor belt applications

Distinguishing Qualities

- Resistant to various oils and fats
- Troughing can be considered in specified applications
- Food Grade PVC top cover
- Friction impregnated bottom cover
- Vee ribs can be fitted to back surface to allow improved belt tracking
- Cleated profiles can be fitted to top surface up to 50mm high

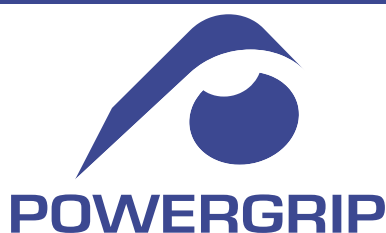

1300 747 470

[www.powergrip.com.au](http://www.powergrip.com.au)

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122