

Product Code

COM-E6

1.2

2 ply Polyurethane Food Grade


Top Cover [mm]	0.2mm FDA Polyurethane - Anti Static (White)
Bottom Cover [mm]	Polyester Monofilament Polyurethane Impregnated
Belt Support	Steel - Stainless Steel
No of Plies	2 ply
Temp Range [°C]	-30 + 90
Max Working Tension [N/mm]	12N/mm 6N/mm for 1% Elongation
Max Width [mm]	1500
Thickness [mm] Nominal	1.45
Normal flexing [mm]	10
Back flexing [mm]	40
Weight [Kg per square meters]	1.9
Join Type	Finger-Overlap-Finger/Bias Lap/Mechanical Fasteners

Applications

- Food grade conveying applications
- Suitable for applications where small drum diameters are required

Distinguishing Qualities

- Proven reliability in the food industry
- Resistance to oil, fats, chemicals and grease
- Lateral stability, for side plough and diverter applications
- Suitable for small drum radiuses with excellent flexibility and reverse flexing
- Non-marking, taste free, odourless, compiles with USDA-FDA
- Top surface Polyurethane, excellent wear resistance, 95 A Shore hardness top cover
- Vee ribs can be fitted to the back surface for improved belt tracking

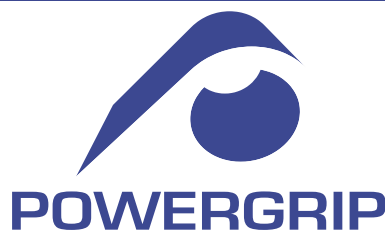

1300 747 470

www.powergrip.com.au

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122