

Product Code

COM-UV30MR

5.6

3 ply Longitudinal Groove


Top Cover [mm]	Longitudinal Groove PVC (Black)
Bottom Cover [mm]	Clear Polyester Fabric
Belt Support	Steel - Stainless Steel/Live Rollers
No of Plies	3 ply
Temp Range [°C]	-5 + 80
Max Working Tension [N/mm]	30N/mm 15N/mm for 1% Elongation
Max Width [mm]	2000
Thickness [mm] Nominal	4.3
Normal flexing [mm]	50
Back flexing [mm]	60
Weight [Kg per square meters]	3.5
Join Type	Bias Lap/Mechanical Fasteners

Applications

- Conveying goods on steep incline/decline

Distinguishing Qualities

- Excellent grip and product holding due to the longitudinal grooves, combined PVC of A45 shore hardness
- Flexible with good reverse flexing characteristics
- Vee ribs can be fitted to the back surface to allow for improved belt tracking

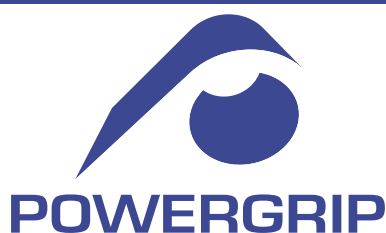

1300 747 470

www.powergrip.com.au

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122