

Product Code

COO-UB30AAW

1.7

3 ply PVC Food Grade (30N/mm)


| | |
|-------------------------------|---|
| Top Cover [mm] | 1.0mm PVC (White or Tan) |
| Bottom Cover [mm] | Clear Polyester Monofilament Fabric |
| Belt Support | Steel - Stainless Steel |
| No of Plies | 3 ply |
| Temp Range [°C] | -5 + 80 |
| Max Working Tension [N/mm] | 30N/mm 18N/mm for 1% Elongation |
| Max Width [mm] | 2000 |
| Thickness [mm] Nominal | 4.2 |
| Normal flexing [mm] | 150 |
| Back flexing [mm] | 180 |
| Weight [Kg per square meters] | 5.3 |
| Join Type | Finger-Overlap-Finger/Bias Lap/Mechanical Fasteners |

Applications

- Food grade conveying applications (FDA-USDA approved)
- Applications where high resistance to animal fats and mineral oils are required

Distinguishing Qualities

- Rigid monofilament Polyester fabrics provides good belt stability and resistance to belt curl on the edges
- Cleated profile can be fitted to the top surface 25, 50 or 75mm high
- Vee rib profiles can be fitted to the bottom surface for improved belt tracking

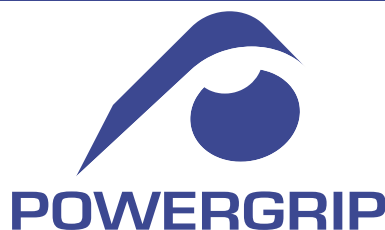

1300 747 470

www.powergrip.com.au

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122