

Product Code

COP-NT03E

4.3

3 ply Transmission


Top Cover [mm]	Polyester/Cotton Rubber Impregnated
Bottom Cover [mm]	Polyester/Cotton Rubber Impregnated
Belt Support	Live Rollers
No of Plies	3 ply
Temp Range [°C]	-10 + 70
Max Working Tension [N/mm]	18N/mm 12N/mm for 1% Elongation
Max Width [mm]	1200
Thickness [mm] Nominal	3.7
Normal flexing [mm]	100
Back flexing [mm]	160
Weight [Kg per square meters]	4.6
Join Type	Bias Lap/Mechanical Fasteners

Applications

- General purpose applications

Distinguishing Qualities

- Moderate resistance to fats, vegetable and mineral oils
- Excellent service life in a variety of general purpose conveying applications
- Resistance to abrasion and cutting

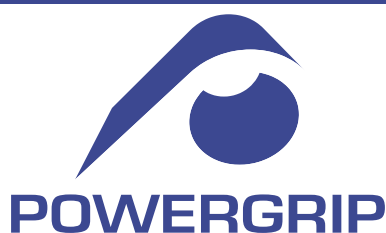

1300 747 470

[www.powergrip.com.au](http://www.powergrip.com.au)

VIC: 03 9890 0344

NSW: 02 9676 3066

QLD: 07 3275 1717

WA: 08 9456 1122